

### Product Features

- 8" CCTV LCD Monitor
- Rack mountable (side-by-side) for standard 19" rack
- Resolution 800 x 600 pixels
- NTSC/PAL auto recognition
- BNC input/output, 2 Signal triggers
- Multi-language OSD
- Last memory for settings when powered off
- Power saving while no signal input
- Low power consumption with LED backlight
- Key lock function
- Trigger and auto switch features allow the monitors to change input sources




### Specification

Specification \ Model		LV80N	LV80NH
LCD Panel	Viewing Area	8"	8"
	Backlight Unit	LED	LED
	Resolution	500TVL, 800 x 600 (SVGA)	500TVL, 800 x 600 (SVGA)
	Color	16.7M	16.7M
	Viewing Angle	Horizontal: 140° / Vertical: 140° (Typ.)	Horizontal: 140° / Vertical: 140° (Typ.)
	Response Time (Tr/Tf)	10/15ms (Typ.)	10/15ms (Typ.)
	Contrast Ratio	500 : 1 (Typ.)	500 : 1 (Typ.)
	Brightness	250 cd/m <sup>2</sup> (Typ.)	500 cd/m <sup>2</sup> (Typ.)
Video Input	VGA Signal	BNC in/out x 1, VGA x 1, Signal trigger x 2	
	Scan Frequencies	640 x 480@60 Hz, 800 x 600@60/75 Hz, 720 x 480@60 Hz	
Audio		Audio in/out x 1	
Control	Power	On / Off with LED Indicator	
	OSD	OSD Control by MENU, UP, DOWN, ENTER ( Auto-adjustment )	
Power Adaptor	Input	AC 100~240V, 50/60 Hz	
	Output	DC 12V / 1.5A	
Power	Management	VESA DPMS Standard	
	Consumption	10W max / Standby 2W max	
Environment	Temperature	0°~40°C	
	Humidity	10%~85%	
Safety & EMI		FCC, CE	
Optional	Glass	Anti-Reflection Strengthen Glass	
	Cabinet Color	Black	

\*Specifications subject to change without notice.


### Dimension

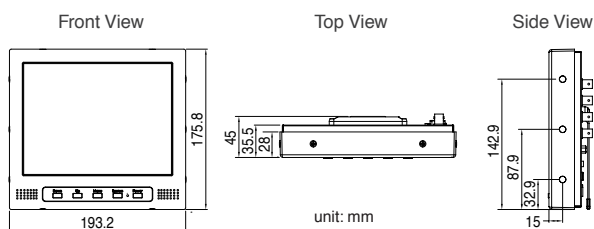


### Accessory



Adjustable View Angle for Rack



Hinge Stand as a Photo Frame



RK-80 Rack Assembly

19" Rack Side by Side

